



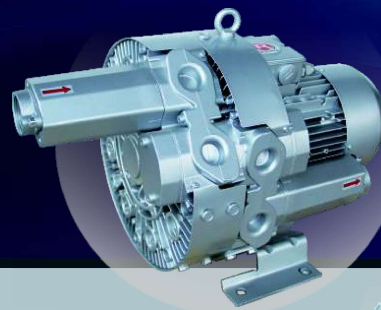

瑞贝克气环式真空泵

Ribake Side Channel Vacuum Pump

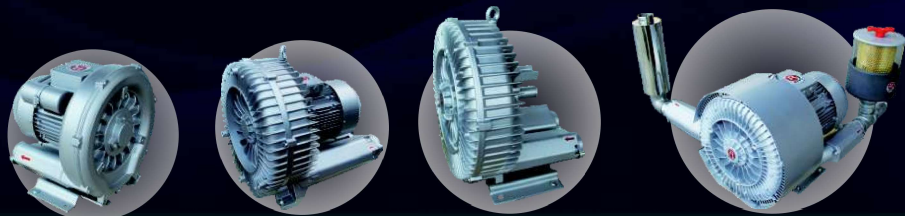

瑞贝克精密机电有限公司

地址: 深圳市宝安区松岗燕川第三工业区景业路2号C栋1-2楼
电话: 0755-32997092 32997093
传真: 0755-29882904
邮箱: szribake@126.com
网址: www.ribake.com

Ribake Precision Machinery Co.,LTD

ADR: No.2,Jingye Road,Yanchuan,Song'gang,Bao'an,Shenzhen
TEL: 0755-32997092 32997093
FAX: 0755-29882904
E-mail: szribake@126.com
Http: //www.ribake.com

瑞贝克精密机电有限公司

版权所有--瑞贝克集团有限公司



2BHB4 3AC



气环式真空泵在真空和压力操作的选型和订购参数. 三相电机

Selection and ordering data for side channel blowers in vacuum and pressure operation, three-phase current

订购型号	马 达				最大流量	最高真空	最高压力	重量	噪音	过滤器	泄压阀
	频率	输出功率	额定								
			电压	电流							
Order No	MOTOR				Maximum airflow	Maximum vacuum	Maximum pressure	Weight	Sound	Air Filter	Pressure relief Valve
	Hz	output KW	rated voltage V	current A	m³/h	Mbar	Mbar	Kg	DB(A)		
2BHB410-H06	50	0.7	200-240 Δ/345-415Y	3.8Δ/ 2.2Y	145	-120	120	13	63	MF-12	RV-01
	60	0.83	220-275 Δ/380-480Y	3.75Δ/ 2.15Y	175	-130	130	16	64		
2BHB410-H16	50	1.1	200-240 Δ/345-415Y	4.0Δ/ 2.3Y	145	-160	160	16	63	MF-12	RV-01
	60	1.3	220-275 Δ/380-480Y	3.85Δ/ 2.25Y	175	-160	160	17	64		
2BHB410-H26	50	1.3	200-240 Δ/345-415Y	5.7Δ/ 3.3Y	145	-170	200	17	63	MF-12	RV-01
	60	1.5	220-275 Δ/380-480Y	6.0Δ/ 3.5Y	175	-210	220	14	64		
2BHB430-H06	50	0.7	200-240 Δ/345-415Y	3.8Δ/ 2.2Y	180	-70	70	17	64	MF-12	RV-01
	60	0.83	220-275 Δ/380-480Y	3.8Δ/ 2.2Y	210	-50	50	14	65		
2BHB430-H16	50	1.1	200-240 Δ/345-415Y	4.2Δ/ 2.4Y	180	-120	120	17	64	MF-12	RV-01
	60	1.3	220-275 Δ/380-480Y	4.0 Δ/ 2.3Y	210	-90	70	17	65		
2BHB430-H26	50	1.3	200-240 Δ/345-415Y	6.6Δ/ 3.8Y	180	-170	220	18	64	MF-12	RV-01
	60	1.5	220-275 Δ/380-480Y	6.9Δ/ 4.0Y	210	-200	160	25	66		
2BHB420-H36	50	1.6	200-240 Δ/345-415Y	7.5Δ/ 4.3Y	150	-280	280	25	69	MF-12	RV-01
	60	2.05	220-275 Δ/380-480Y	7.6Δ/ 4.4Y	180	-320	310	27	66		
2BHB420-H46	50	2.2	200-240 Δ/345-415Y	9.7Δ/ 5.6Y	150	-330	440	27	69	MF-12	RV-02
	60	2.55	220-275 Δ/380-480Y	10.0Δ/ 5.8Y	180	-350	420				



2BHB4系列 50/60Hz选型图表 三相电机

2BHB4 Series Selection Diagram 50/60Hz

3AC

下面的性能曲线是在抽吸15℃空气，排气压力1013mbar的工况下测出的，允差±10%，吸入空气和环境温度不超过25℃时，仍可达到图示总压差。

The performance curves are valid for pumping air at 15℃ at the inlet flanges with an air pressure of 1.013 mbar and a tolerance of ±10%.The total pressure differences are valid up to an intake and ambient temperature of 25℃.

